

D5010

PET Protective Film(D Series)

Technical Data

• Product Description

It is a single coated PET protective film .


• Key Features

Low adhesion & No adhesive residue.
Good performance for die-cutting.
Excellent resistance to demanding environmental conditions.
Have a high degree of temperature resistance.

• Application Ideas

Protect the LCD , OLED, EL, PDP, Touch-panel, PDA, Printing Film,FPC,etc.

• Construction

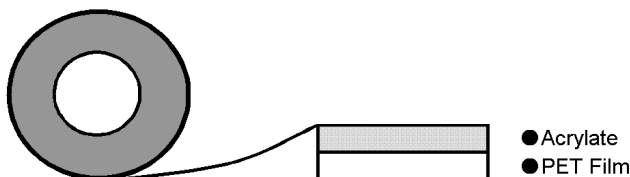

• Technical Data

Test Item		Unit	Value/Result	Test Method
Thickness	PET Film	mm	0.05	-
	Total	mm	0.058±0.02	-
Peel Force		g/inch	5~8	ASTM D-3330, To Polycarbonate, 180° Peel
Temperature Resistance		hrs	120	To Stainless Steel Panel, PET film, 80℃ Temperature, No residue on substrate.
Width		mm	1200	-
Color		Transparent		-
Release Liner		NO		-

• Shelf Life & Storage Conditions

Shelf life 6 months from the date of manufacture when stored in original cartons at 18-25℃ and 30-75% relative humidity.

Notes: The information contained in this data sheet is intended to assist you in designing with InCheng products. The technical information and datas should be considered representative or typical only. It is not intended to and does not create any warranties, express or implied, including any warranty of merchantability or fitness for particular purpose or that the results shown on this data sheet will be achieved by user for a particular purpose. The user should determine the suitability of InCheng adhesive tape for each application.

深圳仁盛化成材料技术有限公司

InCheng Chemical Co., Ltd



Tel: (+86)755-86962203

Fax: (+86)20-38892205

www.incheng.net